



Hammonds[®]
 Custom-Built
HCG600
 –for–
Gulfstream[®]
 for the injection
 of **Biobor**[®] JF
 or **Kathon**[®]
 biocides into
 jet fuel...


Hammonds Technical Services, in conjunction with **Gulfstream Aviation**, has produced totally portable systems for the purpose of injecting **Biobor**[®] JF and **Kathon**[®] biocides into jet fuel. The **Hammonds HCG600 Portable Hydrant Cart** is a mobile unit capable of additive injection at any point in the refueling process.

As with all other **Hammonds Injection Systems**, the HCG600 provides “**proportionate to flow**” additive blending. Because Hammonds injectors are powered by the flow of fuel, a **constant and accurate additive** to fuel ratio is maintained. This ensures that the correct additive to fuel ratio remains consistent throughout the refueling process. **Simple yet effective.**

All **Hammonds Injection Systems** use the flow of fuel to provide all the energy necessary to operate the unit. **No outside power source is necessary.** The additive is blended constantly and evenly into the flowing fuel so there are **no “pulses” or “slugs”** of additive as with other systems.

The **Gulfstream carts** are provided with a **Hammonds 1P7** piston pump for **Biobor**[®] JF and a **Hammonds 1P5** piston pump for **Kathon**[®] in conjunction with Hammonds most popular fluid motor, the Model 600. The carts are designed with **two individual six-gallon stainless steel additive tanks** for safe, long term storage of the additives.


- Inject additives at any point in the refueling process
- Proportionate to flow blending
- No outside power source necessary
- Hammonds Model 600 fluid motor
- Individual control panels for each additive
- (2) 6-gallon stainless steel additive tanks
- Individual additive pumps for selective additive blending
- 8” pneumatic tires with swivel casters and brakes
- Removable tow bar with storage

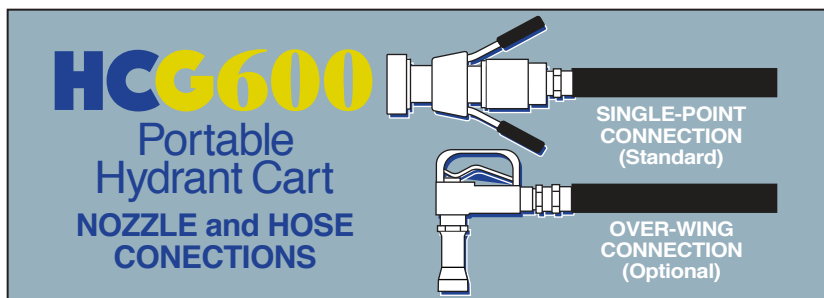

INNOVATION—pure and simple



6807 West Little York Road
 Houston, Texas 77040
 (800) 582-4224

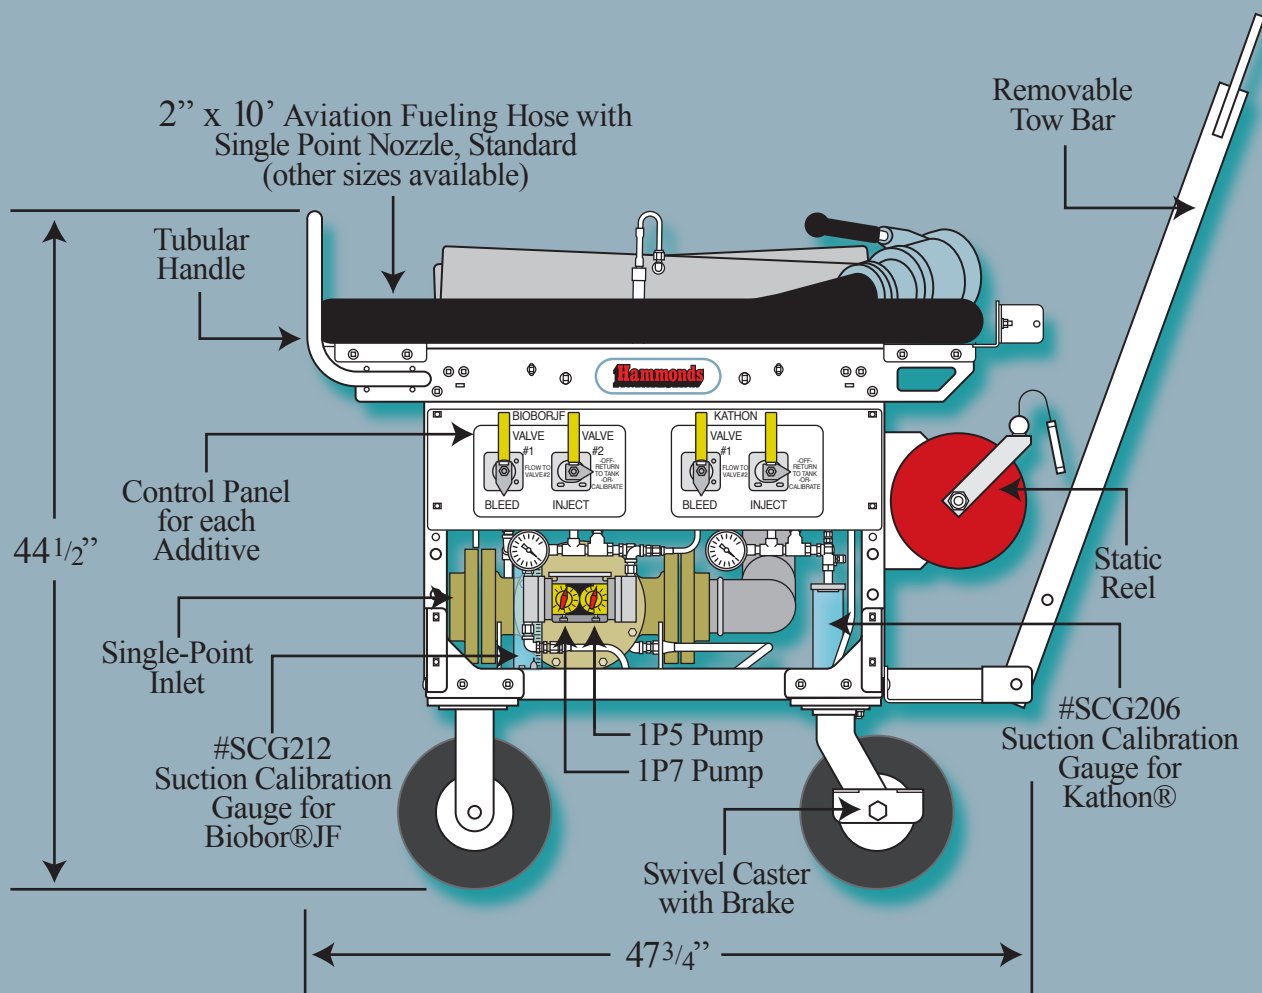

HCG600

Portable Hydrant Cart

- Hose (2" x 10') with single-point nozzle (standard)
- Overwing fueling nozzle available
- 2 Calibration Gauges (SCG212 and SCG206)
- Static ground reel with 50' cable
- Pressure Simulation Calibrators for accurate calibration of additive rates
- Removable tow bar with integrated storage
- Rugged construction, built to last

